
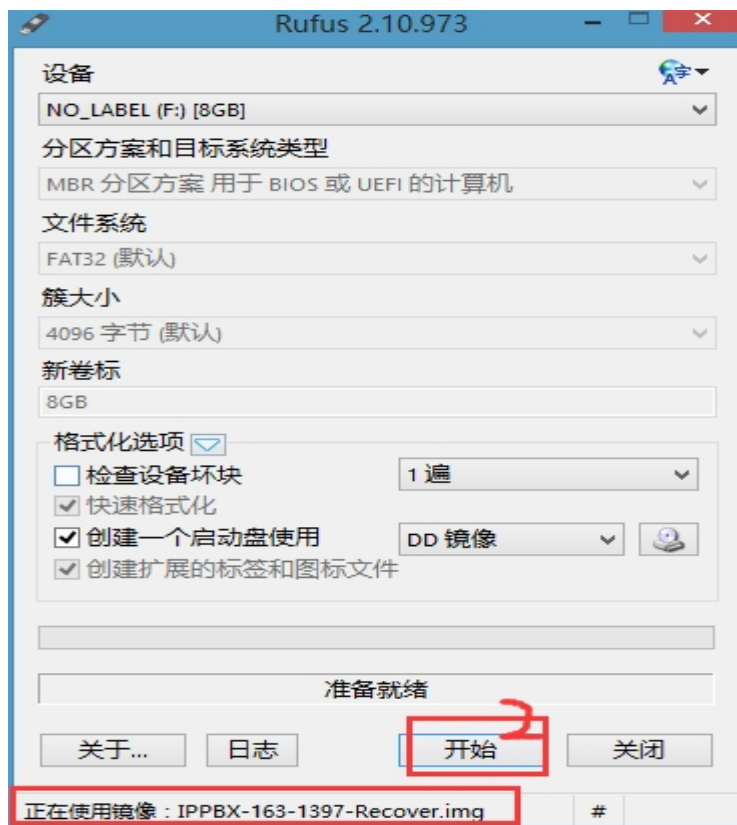


Download U_recover file from :

<http://image.openvox.cn/IPPBX-163-1397-Recover.img>

1. make U-disk system on windows with Rufus .

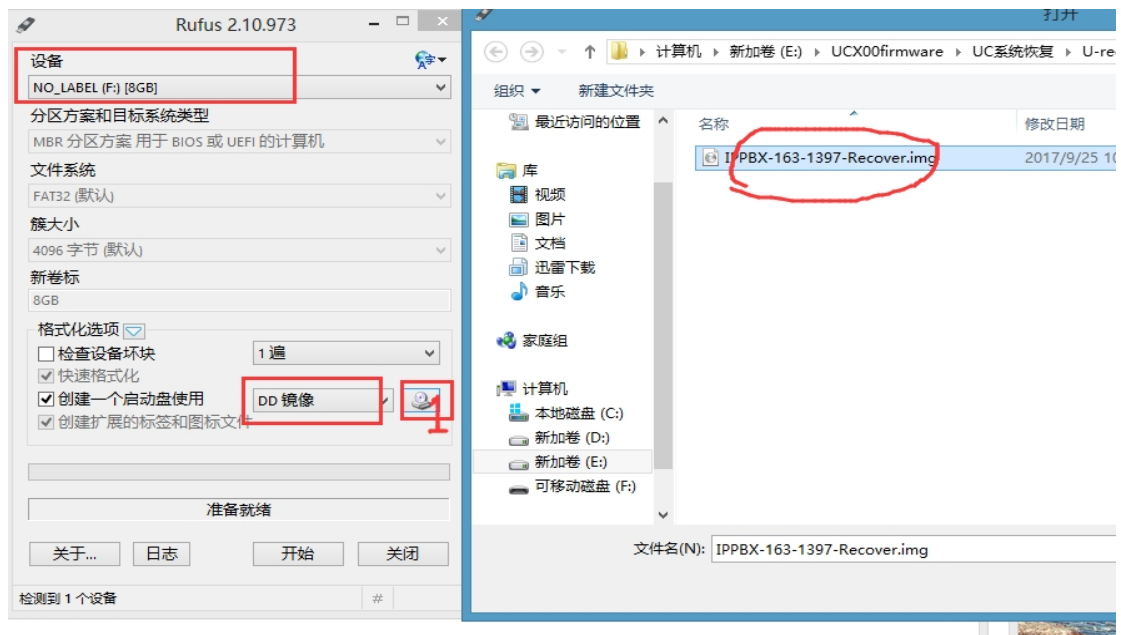

After finish close the Rufus and plug out U-disk from PC .

1.After this ,put USB-disk on UC300 usb port ,then power on the device

2.After a buzzing ,press the RST button more than 3s.withdraw your hand when the RUN LED green normal .

3.It come to reinstall firmware when the RUN LED is blinking fast.

4.May need 2-3 min to reinstall firmware ,if finished ,the RUN LED will be come green normal.

5.After reinstall firmware .Out put USB-disk , plug out the power sulppy and plug on after 20 s .